


Product Data Sheet

RIG WASH AND HIGH PRESSURE CLEANER



Formula 1115

Created in 1987, Eurolube Chemicals was invented to deliver Thorough, Safer and Greener (TSG) cleaning solutions to our key clients in the marine, offshore and heavy industry. Now more than 35 years later, as a testimony to Eurolube's TSG approach, our client base has expanded, as has our product range. Today, Eurolube's offerings contain more than 50 core products targeted at addressing a wide variety of sector from agriculture, food manufacturing to niche industry needs.

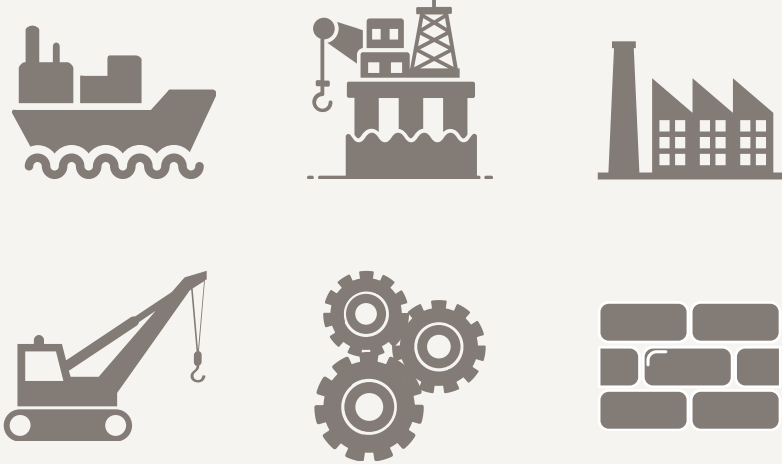

Cleaning Effectiveness

Penetrates deep into recesses and crevices of equipment and machinery to clean out hydrocarbons, soils without disassembling. The resultant run-off will not harm tarmac or asphalt, painted surfaces and seal rings.

Powerful, Fast Wetting & Penetration – which enables it to remove heavy deposits of oil, dirt and grease from wood, concrete or metal surfaces, vessel bilge decks, engine room, Boiler or thread connection, floor or wall, suitable for pressure washing machine and etc.




'Tick all the boxes'

Water based, no flash point, practically non toxic even to the most sensitive aquatic species. Components used are biodegradable and bio-accumulation in this product is insignificant. Will not cause burning sensation when in contact with skin. No harsh fumes when in use, can be diluted for cost effective operations and effective in cleaning hard surfaces and hard to reach areas.



Direction of Use

Wet area to be clean & apply solution into spray lance tank with mixture of water. Work from top to bottom, best dilution is to always test a small area to determine the best dilution rate.



Methodology

Been tested to remain stable at high and low temperature. Can be used with steam cleaner and cold washer. Will not clogged coils and no undissolves particles. 100% Soluble in soft & hard water.



Results

Safe cost & time, protect user, asset & environment. Peace of mind during operations, transportation & storage, no corrosion & combustible hazards.

DOF: FRIBM: 600-1/1/23 (57)
GESAMP/LC50/Practically Not Toxic



Available Packing

- 25 Liters Carboy
- 200 Liters Drum
- 1000 Liters IBC

HS Code : 34011990



Application



Physical Properties

Appearance	Yellow Liquid
Odour	Pleasant Citrus
pH	12± 1
Biodegradability	Biodegradable
Specific Gravity	1
Flash Point	Not applicable
Flammability	Not Flammable
Viscosity	Same as Water
Solubility	Soluble in water



Singapore | Malaysia | Fujairah | Rotterdam | Houston

2 Gul Link
Singapore 629372

+65 6764 3172
+65 6764 5615
enquiry@unitedrm.com.sg



United Resources

We Never Stop At Good Enough



CERT. No: FS 76697
BS EN ISO 9001 : 2015
CERT. No: EMS 628003
BS EN ISO 14001 : 2015